


SELL / SPEC SHEET - SPECTRUM LVT2520



LVT2520-1022
METRO GREY



LVT2520-8050
SILVER FOX

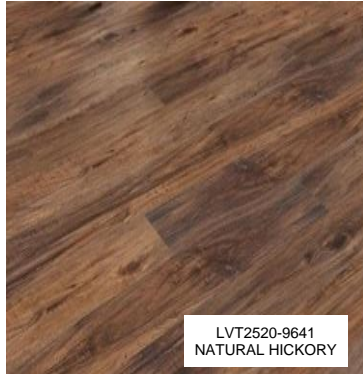

LVT2520-9641
NATURAL HICKORY



LVT2520-1011
JERSEY OAK

STYLE #	LVT2520
CONSTRUCTION:	Direct Glue LVT
CONSTRUCTION:	2.5 mm
WEARLAYER:	20 mil (.50 mm) PU PVC
FINISH:	Ultimate Ceramic Bead Protection
EMBOSSING:	Semi-EIR
PLANK SIZE:	7" x 48"
EDGE:	Micro Bevel
SQ FT/CARTON:	42.75
SQ FT/PALLET:	2351.25
INSTALLATION:	Adhesive full spread *
WARRANTY:	<u>LIFETIME Waterproof</u>
	<u>LIFETIME Residential</u>
	<u>20 Year Commercial</u>
	<u>Kid & Pet Proof</u>
	<u>Scratch Proof</u>
	PHthalate FREE
	FLOOR SCORE® CERTIFIED
RECYCLED CONTENT:	100% Recycled Post Use



TESTING:

Chemical Resistance	ASTM F925	Superior - no change during testing
Color Resistance to Heat	ASTM F1514	Meets <8.0 Delta E Requirement
Critical Radiant Flux	ASTM E648	Class I
Density of Smoke	ASTM E662	
flaming condition		corrected Max. Ds: Average 425
nonflaming condition		corrected Max. Ds: Average 364
Dimensional Stability	ASTM F2199-18	Passed
Flexibility	ASTM 137	Passed
Measuring Heat Stability	ASTM F1514	Passed
Resistance to heat	ASTM F1514	Passed
Resistance to Light	ASTM F1515	Passed
Sound Testing	ASTM E90/E492	STC 53 / IIC 45
Static Coefficient of Friction	ASTM 2047	Passed
Static Load Limit	ASTM F970	.002 inch- Passed at 250 psi
Surface Flammability	DOC FF1-70	Passed
Tabor Abrasion Resistance	EN13329	4800 R

INSTALLATION:

On, above or below grade (for indoor use only)

SUGGESTED ADHESIVES & UNDERLAYMENT:
 TEC774 Flexera Premium Universal Adhesive
 Legget&Platt - Whisper Step Underlayment - BM0042 100 & 200 sf/rolls

July 1, 2020